

205.W37-B**WALL BOX 1 PRISE TYPE 2**

Type 2 1P+N+T 32A 230V~ 7,4kW
32A 230V 1P+N+T IP55 IK10 OCPP
1.6 JSON



* L'image du produit peut être indicative



IEC 61439-7 (2018)
EN IEC 61851-1 (2019)
Directive BT 2014/35/EU
Directive EMC 2014/30/EU

■ CARACTÉRISTIQUES GÉNÉRALES

Série commerciale	Série BE-W[2.0]
Description	WALL BOX 1 PRISE TYPE 2
Version	BUSINESS
Type de installation	MONTAGE SAILLIE
EV standard	Type 2 1P+N+T 32A 230V~ 7,4kW

■ CARACTÉRISTIQUES TECHNIQUES

Courant nominal	32A
Tension nominale	230V
Fréquence d'utilisation	50/60Hz
Pôles	1P+N+T

■ CARACTÉRISTIQUES PHYSIQUES

Matériau	Technopolymère
Indice de protection IP	IP55
Température de fonctionnement	-30°C/+55°C with derating
Fil incandescent	650°C
Indice de protection IK	IK10
Couleur	ANTHRACITE
Solution saline	Résistant
UV protection	UV resistant
Type de installation	MONTAGE SAILLIE

■ CARACTÉRISTIQUES DIMENSIONNELLES


Dimensions	235x370x115mm
------------	---------------

■ INTERFACE, COMMANDES, FONCTIONS ET ÉQUIPEMENTS

Version	BUSINESS
EV standard	Type 2 1P+N+T 32A 230V~ 7,4kW
IHM (Interfaces Homme-Machine)	LCD 2x20 char APP
Authentification d'utilisateur	Authentification RFID Authentification depuis l'APP Free
Connectivité	Aucun
Protocole de communication	OCPP 1.6 JSON
EV functions	charge in mode 3 with pwm circuit pilot predisposition for serial communication energy metering and current consumption working in mode stand-alone free or personal identification of authorized user protection against direct contact Safety Child Shutters identification of connected cord-set size POWER MANAGEMENT function embedded managing of latching system remote control with smartphone APP wireless connection to Wi-Fi home

EV equipment	1 terminal strip 3x10mm ²
	1 power supply 24Vdc 36W
	1 fuse holder 1P+N gG 4A
	1 DC Leakage detector
	1 RBG led stripes
	1 backup battery
	1 reader RFID 13,56MHz
	1 stop charge push-button (mode free)
	1 modular contactor 2P 40A 24Vdc
	1 lcd display 2x20 rows backlight
	1 control card with Wi-Fi connection 2,4GHz
	1 digital energy meter MID 1P+N 40A
EV excluded	upstream protections (by the installer):
	1 circuit breaker 1P+N $\geq$ C32 / 30mA ist. A

■ DIMENSION

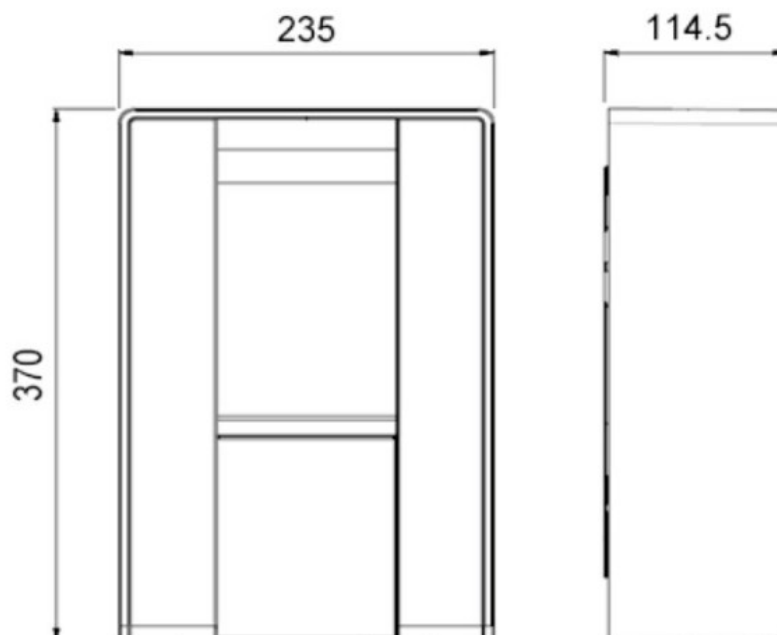

■ TÉLÉCHARGER

Dessin Technique [PDF]
Dessin Technique [DWG]
Dessin Technique [STP]
Notice d'instructions